



- Dual time
- 1/100-second stopwatch
- 50-meter water resistance
- EL backlight
- Front buttons
- Sporty color selection



Package

Module No. 3171

- EL backlight
- Afterglow
- Dual time
- 1/100-second stopwatch
- Measuring capacity: 23:59:59.99"
- Measuring modes: Elapsed time, split time, 1st-2nd place times
- Daily alarm
- Hourly time signal
- Full auto-calendar (to year 2099)
- 12/24-hour format
- Regular timekeeping: Hour, minute, second, pm, month, date, day
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on CR1216
- Size of case / total weight
- LDF-52 46.7 × 23.6 × 11.4 mm / 25 g



EL:Blue Green

LDF-52-1ADR 3171 ©

Resin

±20mm 4.3vms CR1216



4 971850 934257



EL:Blue Green

LDF-52-4ADR 3171 ©

Resin

±20mm 4.3vms CR1216



4 971850 934295



EL:Blue Green

LDF-52-6ADR 3171 ©

Resin

±20mm 4.3vms CR1216



4 971850 934332



EL:Blue Green

LDF-52-7ADR 3171 ©

Resin

±20mm 4.3vms CR1216



4 971850 934370

LADIES' SPORTY DIGITAL

10-YEAR BATTERY LIFE

- Dual time
- 1/100-second stopwatch
- 50-meter water resistance
- Auto LED light
- Front buttons
- Sporty designs in vivid colors

Module No. 3257

- LED light
- Auto light switch, afterglow
- Dual time
- Stopwatch: Time and distance measurements
- Measuring unit: 1/100 (lower part of the display for first 60 minutes, center part of the display for first 10 hours) or 1 second (lower part of the display after 60 minutes, center part of the display after 10 hours); 0.1 miles or km
- *Changeover between centimeters (cm) and miles (mi).
- Measuring capacity: 99:59'59"; 99.9 miles or km; 999.9 miles or km (total distance covered)
- Measuring modes: Elapsed time, lap/split times
- Memory capacity: Up to 61 records (used by lap/split time records and log title screens); total distance covered
- Basic data input: Stride length 40 to 190 cm (16 to 76 inch)
- *Changeover between centimeters (cm) and inch (in)
- Others: Pacer signal; lap/split number (from 01 to 99); Best lap time screen
- Countdown timer
- Measuring unit: 1 second
- Countdown range: 100 hours
- Countdown start time setting range: 1 minute to 100 hours (1-minute increments and 1-hour increments)
- Other: Auto-repeat
- Daily alarms
- 5 independent daily alarms (4 one-time alarms and 1 snooze/one time alarm)
- Hourly time signal
- Full auto-calendar (to year 2039)
- 12/24-hour format
- Regular timekeeping: Hour, minute, second, pm, year, month, date, day
- Accuracy: ± 30 seconds per month
- Approx. battery life: 10 years on CR2025
- Size of case / total weight
- SDB-100-1ADF / 1BDF.....43.9 x 35.1 x 11.4 mm / 28.2 g
- SDB-100-3ADF / 4ADF.....43.9 x 35.1 x 11.4 mm / 27.5 g



LED:Green

SDB-100-1ADF 3257 ©
Resin/Stainless steel

±30sec | ±10 vms | CR2025



4 971850 930266



LED:Green

SDB-100-1BDF 3257 ©
Resin/Stainless steel

±30sec | ±10 vms | CR2025



4 971850 930297



LED:Green

SDB-100-3ADF 3257 ©
Resin/Aluminum

±30sec | ±10 vms | CR2025



4 971850 930327



LED:Green

SDB-100-4ADF 3257 ©
Resin/Aluminum

±30sec | ±10 vms | CR2025



4 971850 930358

SPORTY DIGITAL

10-YEAR BATTERY LIFE

- World map for World Time
- 1/100-second stopwatch
- LC Analog display (Home city time)
- 100-meter water resistance
- Leather and cloth band (AE-1100WB)

Module No. 3264

- LED backlight
 - Selectable illumination duration, afterglow
- Multi Time (4 different cities)
- World time
 - 31 time zones (48 cities + coordinated universal time), daylight saving on/off, Home city / World time city swapping
- 1/100-second stopwatch
 - Measuring capacity: 23:59:59.99"
 - Measuring modes: Elapsed time, split time, 1st-2nd place times
- Countdown timer
 - Measuring unit: 1/10 second
 - Input range: 1 second to 24 hours (1-second increments, 1-minute increments and 1-hour increments)
- Alarms
 - 5 independent alarms (one-time or daily)
- Hourly time signal
- Full auto-calendar (to year 2099)
- 12/24-hour format
- Button operation tone on/off
- Regular timekeeping
 - Digital: Hour, minute, second, pm, month, date, day
- Accuracy: ±30 seconds per month
- Approx. battery life: 10 years on CR2025
- Size of case / total weight
 - AE-1100W 48.1 × 43.7 × 13.7 mm / 27 g
 - AE-1100WB 48.1 × 43.7 × 13.7 mm / 25 g
 - AE-1100WD 48.1 × 43.7 × 13.7 mm / 82 g



LED:Amber

AE-1100W-1AVDF 3264 C

Resin

±30mm ±10vms CR2025



4 971850 934431



LED:Amber

AE-1100W-1BVDF 3264 C

Resin

±30mm ±10vms CR2025



4 971850 934462



LED:Amber

AE-1100WB-3AVDF 3264 C

Resin

±30mm ±10vms CR2025



4 971850 934493



LED:Amber

AE-1100WD-1AVDF 3264 C

Resin

±30mm ±10vms CR2025



4 971850 934523

LADIES' STANDARD DIGITAL

- Popular retro design
- Compact, easy-to-use size
- 1/10-second stopwatch
- Water resistant

Module No. 3191

- 1/10-second stopwatch
Measuring capacity: 59'59.9"
- Measuring mode: Elapsed time
- Countdown timer
Countdown range: 30 minutes
Preset countdown start times: 1, 3, 5, 10, 15, 20, 30 minutes
- Daily alarm
- Hourly time signal
- Auto-calendar (28 days for February)
- Regular timekeeping: Hour, minute, second, pm, month, date, day
- Accuracy: ±30 seconds per month
- Approx. battery life: 2 years on CR1216
- Size of case / total weight
LA670WGA30.3 × 24.6 × 7.3 mm / 27.8 g



LA670WGA-2DF 3191 ©

Resin

1.30mm | 2 yrs | CR1216



4 971850 935049



LA670WGA-6DF 3191 ©

Resin

1.30mm | 2 yrs | CR1216



4 971850 935070



LA670WGA-9DF 3191 ©

Resin

1.30mm | 2 yrs | CR1216



4 971850 935100

ANALOG-DIGITAL COMBINATION

- Dual time
- 1/100-second stopwatch
- 50-meter water resistance
- Day and date display at 6 o'clock

Module No. 3321

- Dual time
- 1/100-second stopwatch
Measuring capacity: 59'59.99"
Measuring mode: Elapsed time
- Daily alarm
- Hourly time signal
- Auto-calendar (28 days for February)
- 12/24-hour format
- Regular timekeeping
Analog: 2 hands (hour, minute (hand moves every 20 seconds))
Digital: Hour, minute, second, pm, month, date, day
- Accuracy: ±30 seconds per month
- Approx. battery life: 3 years on SR920W
- Size of case / total weight
AW-90H.....45.0 x 38.6 x 9.5 mm / 30 g



FEB

AW-90H-2BVDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935353



FEB

AW-90H-3E2VDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935384



FEB

AW-90H-4E2VDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935414



FEB

AW-90H-7BVDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935445



FEB

AW-90H-7EVDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935476



FEB

AW-90H-9EVDF 3321 ©
Resin

±30sec ±3vms SR920W



4 971850 935506

STANDARD ANALOG

- 50-meter water resistance
- Multi hands (MTP-1316)
- Two-tone color bezel (MTP-1316/1317)
- Unique, playful design (MTP-1316/1317)
- Simple, easy-to-use design (MTP-1318/1319)

Module No. 1343

- Regular timekeeping
- Analog: 3 hands (hour, minute, second), 3 dials (date, day, 24-hour)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR916SW
- Size of case / total weight
- MTP-1316D.....49.0 x 42.0 x 10.3 mm / 123 g
- MTP-1316.....49.0 x 42.0 x 10.3 mm / 73 g
- MTP-1316B.....49.0 x 42.0 x 10.3 mm / 73 g

Module No. 5207

- Date display
- Regular timekeeping
- Analog: 3 hands (hour, minute, second)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR626SW
- Size of case / total weight
- MTP-1317D.....49.0 x 42.0 x 10.3 mm / 125 g
- MTP-1317.....49.0 x 42.0 x 10.3 mm / 73 g
- MTP-1317B.....49.0 x 42.0 x 10.3 mm / 73 g

Module No. 5206

- Date display
- Regular timekeeping
- 3 hands (hour, minute, second)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR626SW
- Size of case / total weight
- MTP-1318BD.....56.2 x 48.1 x 10.2 mm / 145 g
- MTP-1318GD.....56.2 x 48.1 x 10.2 mm / 145 g
- MTP-1319BD.....50.0 x 45.6 x 10.0 mm / 124 g
- MTP-1319GD.....50.0 x 45.6 x 10.0 mm / 124 g



MTP-1316D-2AVDF 1343 ©
Stainless steel/Aluminum

± 20 sec ± 3 mm SR916SW



4 971850 935902




MTP-1316D-4AVDF 1343 ©
Stainless steel/Aluminum

± 20 sec ± 3 mm SR916SW



4 971850 935926

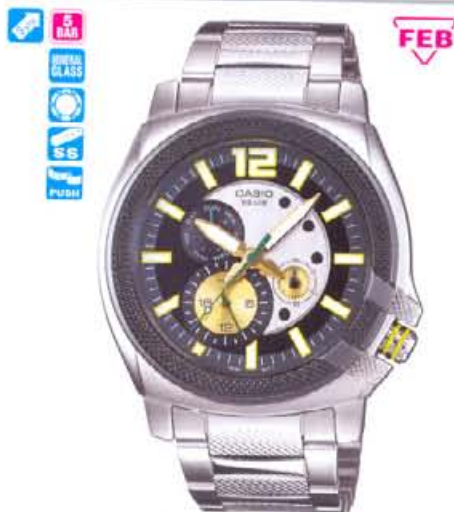

MTP-1316D-9AVDF 1343 ©
Stainless steel/Aluminum

± 20 sec ± 3 mm SR916SW



4 971850 935940



MTP-1316-4AVDF 1343 ©
Stainless steel/Aluminum

± 20 sec ± 3 mm SR916SW



4 971850 935964



FEB

MTP-1316B-2AVDF 1343 ©
Stainless steel/Aluminum

±20mm 3 yrs SR916SW



4 971850 935827



FEB

MTP-1316B-4A1VDF 1343 ©
Stainless steel/Aluminum

±20mm 3 yrs SR916SW



4 971850 935841



FEB

MTP-1316B-4A2VDF 1343 ©
Stainless steel/Aluminum

±20mm 3 yrs SR916SW



4 971850 935865



FEB

MTP-1316B-8AVDF 1343 ©
Stainless steel/Aluminum

±20mm 3 yrs SR916SW



4 971850 935889



FEB

MTP-1317D-2AVDF 5207 ©
Stainless steel/Aluminum

±20mm 3 yrs SR626SW



4 971850 936022



FEB

MTP-1317D-4AVDF 5207 ©
Stainless steel/Aluminum

±20mm 3 yrs SR626SW



4 971850 936046



FEB

MTP-1317-4AVDF 5207 ©
Stainless steel/Aluminum

±20mm | 43mm | SR6265W



4 971850 936060



FEB

MTP-1317B-2AVDF 5207 ©
Stainless steel/Aluminum

±20mm | 43mm | SR6265W



4 971850 935988



FEB

MTP-1317B-4AVDF 5207 ©
Stainless steel/Aluminum

±20mm | 43mm | SR6265W



4 971850 936008



FEB

Partial ion plated

MTP-1318BD-1AVDF 5206 ©
Stainless steel

±20mm | 43mm | SR6265W



4 971850 936084



FEB

Partial ion plated

MTP-1318BD-4AVDF 5206 ©
Stainless steel

±20mm | 43mm | SR6265W



4 971850 936107



FEB

Partial ion plated

MTP-1318BD-7AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936121



FEB

Partial ion plated

MTP-1318GD-1AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936145



FEB

Partial ion plated

MTP-1319BD-1AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936169



FEB

Partial ion plated

MTP-1319BD-2AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936183



FEB

Partial ion plated

MTP-1319BD-7AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936206



FEB

Partial ion plated

MTP-1319GD-1AVDF 5206 ©
Stainless steel

±20mm | 3 yrs | SR626SW



4 971850 936220

LADIES' STANDARD ANALOG

- 50-meter water resistance (LTP-1318/1319/1320)
- Water resistant (LTP-1316/1317/1321/1322/1323/1324)
- Genuine leather band (LTP-1321L/1323L/1324L)

Module No. 1330

- Regular timekeeping
Analog: 3 hands (hour, minute, second)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR626SW
- Size of case / total weight
 - LTP-1316D.....34.5 x 21.2 x 8.0 mm / 66 g
 - LTP-1317D.....30.5 x 20.2 x 7.5 mm / 84 g
 - LTP-1318D.....36.9 x 31.0 x 8.4 mm / 70 g
 - LTP-1319D.....37.0 x 31.0 x 8.4 mm / 70 g
 - LTP-1321D.....47.4 x 40.4 x 7.5 mm / 94 g
 - LTP-1321L.....47.4 x 40.4 x 7.5 mm / 62 g
 - LTP-1322D.....36.0 x 30.0 x 7.5 mm / 54 g
 - LTP-1323D.....34.5 x 28.0 x 7.6 mm / 57 g
 - LTP-1323L.....34.5 x 28.0 x 7.6 mm / 26 g
 - LTP-1324D.....35.0 x 28.0 x 7.6 mm / 55 g
 - LTP-1324L.....35.0 x 28.0 x 7.6 mm / 28 g

Module No. 1343

- Regular timekeeping
Analog: 3 hands (hour, minute, second),
3 dials (date, day, 24-hour)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR916SW
- Size of case / total weight
 - LTP-1320.....37.0 x 32.0 x 9.1 mm / 40 g
 - LTP-1320B.....37.0 x 32.0 x 9.1 mm / 40 g
 - LTP-1320D.....37.0 x 32.0 x 9.1 mm / 68 g

Module No. 4370

- Regular timekeeping
Analog: 2 hands (hour, minute)
- Accuracy: ± 20 seconds per month
- Approx. battery life: 3 years on SR626SW
- Size of case / total weight
 - LTP-1321D.....47.4 x 40.4 x 7.5 mm / 94 g
 - LTP-1321L.....47.4 x 40.4 x 7.5 mm / 52 g



LTP-1316D-1ADF 1330 ©
Stainless steel

± 20 sec | 3 yrs | SR626SW



4 971850 936244



LTP-1316D-2ADF 1330 ©
Stainless steel

± 20 sec | 3 yrs | SR626SW



4 971850 936251



LTP-1316D-4ADF 1330 ©
Stainless steel

± 20 sec | 3 yrs | SR626SW



4 971850 936268



LTP-1316D-6ADF 1330 ©
Stainless steel

± 20 sec | 3 yrs | SR626SW



4 971850 936275



LTP-1316D-7ADF 1330 ©
Stainless steel

± 20 sec | 3 yrs | SR626SW



4 971850 936282



FEB



FEB



FEB

LTP-1317D-1CDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936299

LTP-1317D-2CDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936305

LTP-1317D-4CDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936312



FEB



FEB

LTP-1317D-6CDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936329

LTP-1317D-7CDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936336



FEB



FEB

LTP-1318D-1AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936343

LTP-1318D-2AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 43 mm | SR626SW



4 971850 936350



FEB

LTP-1318D-4AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936367



FEB

LTP-1318D-9AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936374



FEB

LTP-1319D-1AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936381



FEB

LTP-1319D-2AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936398



FEB

LTP-1319D-4AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936404



FEB

LTP-1319D-9AVDF 1330 ©
Stainless steel/Aluminum

±20mm | 4.3 yrs | SR626SW



4 971850 936411



FEB

LTP-1320-4AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938149



FEB

LTP-1320B-2A1VDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938002



FEB

LTP-1320B-2A2VDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938026



FEB

LTP-1320B-4AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938040



FEB

LTP-1320B-5AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938064



FEB

LTP-1320D-2AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938088



FEB

LTP-1320D-4AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938101



FEB

LTP-1320D-9AVDF 1343 ©
Stainless steel/Aluminum

±20mm 43mm SR916SW



4 971850 938125



FEB

LTP-1321D-1ADF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937944



FEB

LTP-1321D-6ADF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937951



FEB

LTP-1321D-7ADF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937968



FEB

LTP-1321L-2ADF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937975



FEB

LTP-1321L-4A1DF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937982



FEB

LTP-1321L-4A2DF 1330/4370 ©
Ion plated

±20mm 43mm SR626SW

±20mm 43mm SR626SW



4 971850 937999



FEB



FEB



FEB

LTP-1322D-1ADF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937791

LTP-1322D-2ADF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937807

LTP-1322D-4A1DF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937814



FEB



FEB

LTP-1322D-4A2DF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937821

LTP-1322D-6ADF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937838



FEB



FEB



FEB

Mother of pearl face

LTP-1323D-4ADF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937845

Mother of pearl face

LTP-1323D-7A1DF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937852

Mother of pearl face

LTP-1323D-7A2DF 1330 ©
Ion plated

±20mm | 3 mm | SR626SW



4 971850 937869



Mother of pearl face

LTP-1323L-4ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937876



Mother of pearl face

LTP-1323L-7ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937883



Mother of pearl face

LTP-1324D-1ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937890



Mother of pearl face

LTP-1324D-6ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937906



Mother of pearl face

LTP-1324D-7ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937913



Mother of pearl face

LTP-1324L-4ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937920



Mother of pearl face

LTP-1324L-9ADF 1330 ©
Ion plated

±20mm ±3 vms SR626SW



4 971850 937937